

miAlarm App

- [Table of Contents](#)
- [Getting Started *](#)
 - [Installation](#)
 - [Account Registration](#)
 - [Adding Devices](#)
 - [First Connection](#)
- [User Guides](#)
 - [Primary Device Configuration](#)
 - [Zone Management](#)
 - [User Management](#)
 - [Notification Configuration](#)
 - [Emergency Contact Management](#)
 - [Advanced Configuration](#)
 - [Subscription Management](#)
 - [Cancellation Emoji Feature](#)
- [Support](#)
 - [FAQ](#)
 - [Troubleshooting Tools](#)
 - [Support](#)
 - [Self-Service Tools](#)

Table of Contents

Welcome to miAlarm

The comprehensive guide to South Africa's leading mobile security management platform. This documentation provides everything you need to effectively manage your security system from anywhere.

Getting Started

A straightforward set of guides to get you up and running quickly

- [Installation](#)
- [Account Registration](#)
- [Adding Your First Device](#)
- [First Connection](#)

[User Guides](#)

Complete operational instructions for daily use

- [Primary Device Setup](#)
- [Zone Management](#)
- [User Management](#)
- [Notification Preferences](#)
- [Emergency Contacts](#)
- [Advanced Configuration](#)
- [Subscription Management](#)

[What's New in v3.0.0](#)

Latest features and improvements

- New Features
- Performance Improvements
- Bug Fixes
- Migration Guide

FAQ & Troubleshooting

Solutions to common questions and issues

- Frequently Asked Questions
- Connection Issues
- Account Problems
- Technical Support

Support

How to get help when you need it

- Contact Information
 - Support Resources
 - Community
-

Contact Information

Technical Support: support@mialarm.co.za

Website: mialarm.co.za

Business Hours: Monday-Friday, 8:00 AM - 16:30 PM SAST

Download miAlarm

iOS: [Download from App Store](#)

Android: [Download from Google Play](#)

Huawei : [Download from AppGallery](#)

About This Documentation

Current Version: 3.0.0

Last Updated: June 2025

This documentation is maintained and updated regularly to ensure accuracy. We believe security should be powerful yet simple to manage.

Getting Started *

Guide to get you started with everything you need to get a device added to your new miAlarm app.


Getting Started *

Installation

Download and Installation


iOS Installation

1. Open the App Store on your iPhone or iPad
2. Search for "miAlarm"
3. Tap "Get" to download and install
4. Wait for the installation to complete

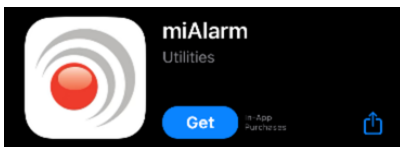


Android Installation

1. Open Google Play Store
2. Search for "miAlarm"
3. Tap "Install"
4. Accept the required permissions when prompted

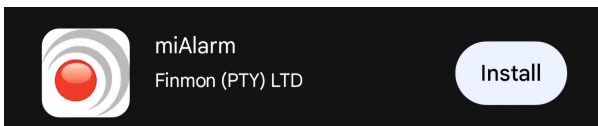

Huawei Installation

1. Open Huawei AppGallery
2. Search for "miAlarm"
3. Tap "Install"

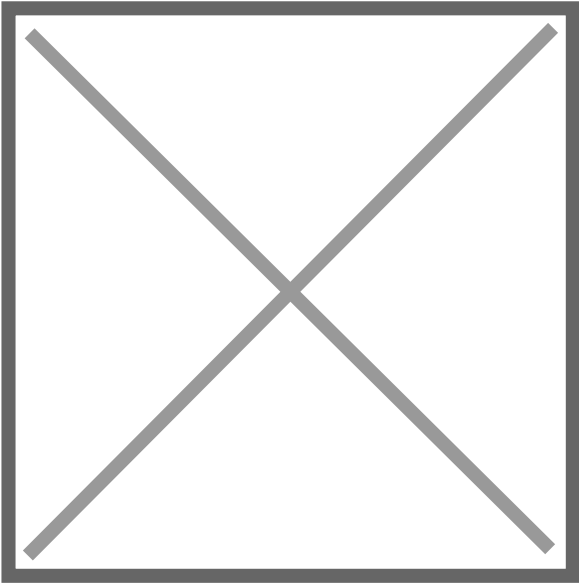

Note: Ensure you have a stable internet connection before beginning the download.

Direct Links

iOS: [Download from App Store](#)

Android: [Download from Google Play](#)

Huawei : [Download from AppGallery](#)

Getting Started *


Account Registration

Creating Your Account

First Launch

When you open miAlarm for the first time, you'll see a welcome screen with two options:

- **Login** - For existing users
- **Register** - For new users

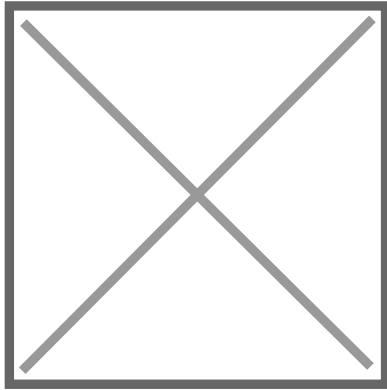

Registration Process

Select "Register" and provide the following information:

1. **Personal Details**

- First Name
- Last Name
- Username (this will be your login ID - choose carefully)
- Email Address
- Contact Number

Register

1 2 3 4 5 6 7


First Name


Last Name

Username

Email

(+27) Contact Number

Password 
Must be more than 8 characters and have 1 number

Confirm Password 

Register

2. Security Credentials

- Password (must include at least one number and one uppercase letter)
 - Confirm Password
3. Complete registration by tapping "Register"

Important Considerations:


- Each email address and phone number can only be used for one account
 - Your username cannot be changed after registration
 - Store your password securely - you'll need it for future logins
 - Create a unique profile per user to avoid any notifications not arriving.
-

Getting Started *

Adding Devices

Adding Your First Device

After successful registration, you'll be automatically logged in and prompted to add your first device.

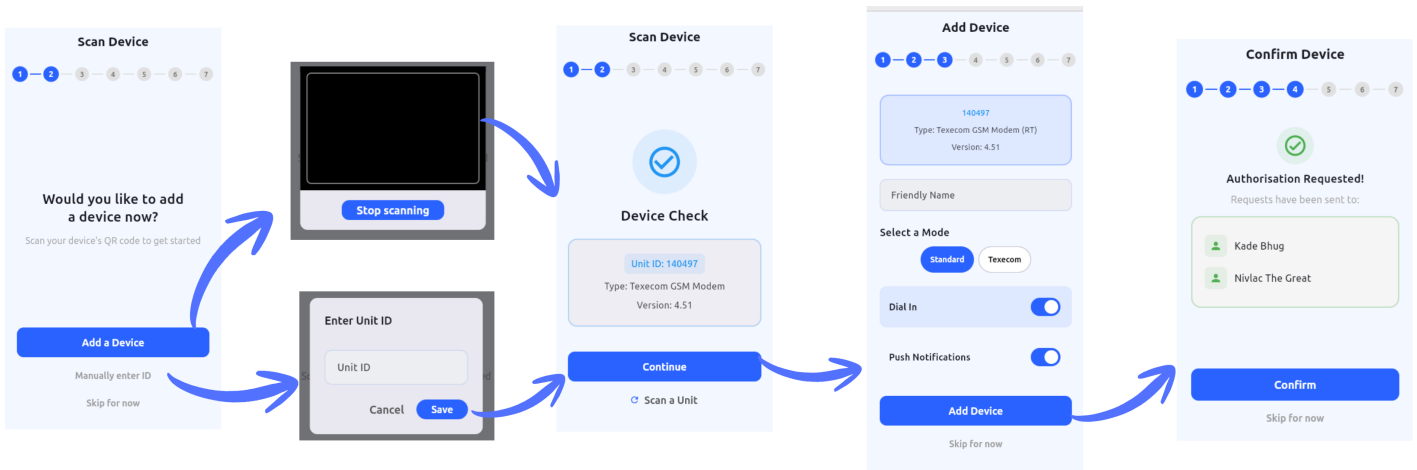

Scan Device

1 — 2 — 3 — 4 — 5 — 6 — 7



Would you like to add a device now?

Scan your device's QR code to get started

Add a Device

Manually enter ID



Skip for now




Enter Unit ID

Unit ID

Cancel **Save**



Stop scanning



Scan Device

Option 1: Scan Device Barcode (Recommended)

The fastest way to add your device:

1. Tap "Add a Device"
2. Allow camera access when prompted
3. Scan the QR code or barcode on your Finmon device
4. The system will automatically populate the device details

Option 2: Manual Entry

If scanning isn't possible:

1. Tap "Manually enter ID"
2. Type your Unit ID (found on the serial number label of your Finmon device)
3. Tap "Continue"

Device Configuration

Once your device is identified, configure these settings:

1. **Friendly Name:** Give your device a meaningful name (e.g., "Home Alarm", "Office Security")
 2. **Dial-In Access:** Enable this option to allow remote control of your alarm panel
 3. **User Code:** Enter your 4-digit alarm code (the same one you use on your keypad)
 4. **Push Notifications:** Enable to receive real-time alerts on your phone
 5. Tap "Add Device" to save your configuration
-

Understanding the Authorization Process

After adding a device, you'll encounter one of three authorization statuses:

Authorization Requested

Your request has been sent to the device administrators. This is normal for shared systems where multiple users have access. Wait for an existing administrator to approve your request.

Master Access Granted

You've been approved as a device administrator. The device will now appear on your home screen with full access privileges.

Duplicate Device

The system detected this device is already linked to your account. Simply return to the home screen and look for your device in the list. If you are unable to find your device, select the 3 menu

lines on the top left of the screen, then select System Options and Restart.

Getting Started *

First Connection

Connecting to Your Device


Once authorized, your device appears on the home screen showing:

- Device name
- Unit ID
- Connection status
- "Open" or "Connect" button



Making Your First Connection

1. Tap "Open" on your device tile
2. If prompted, enter your 4-digit user code
3. Wait for the connection to establish (you'll see a loading screen)
4. Once connected, you'll have full access to monitor and control your alarm system

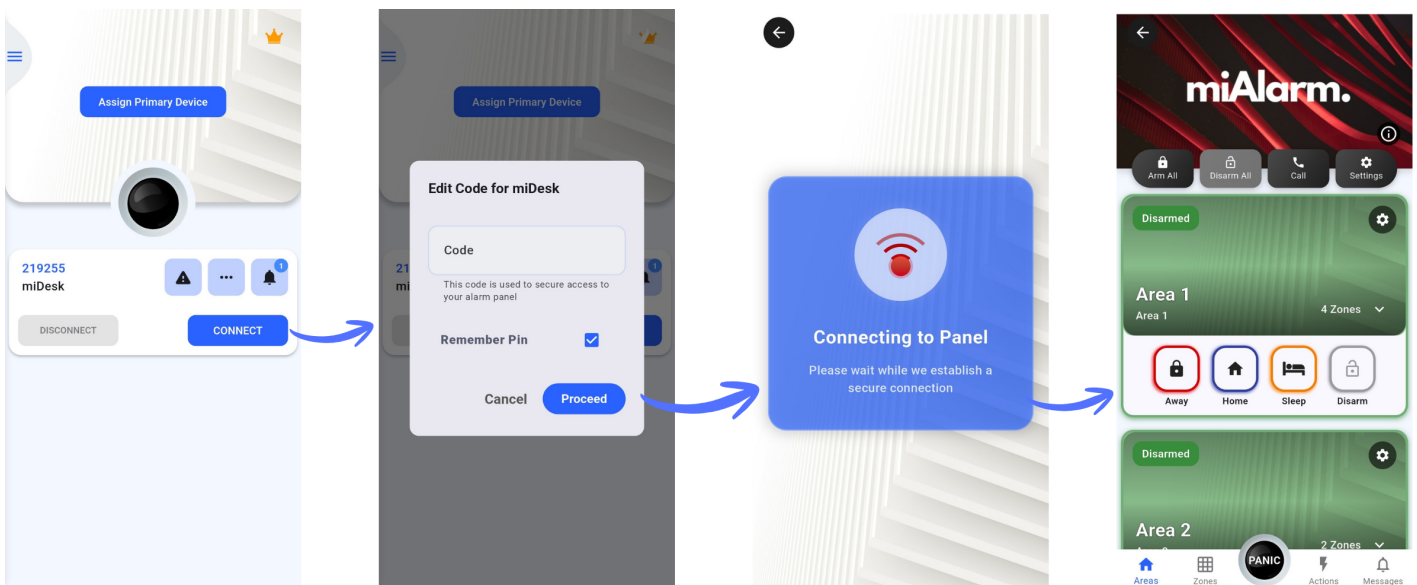

Connection Tips:

- Ensure your alarm unit has power and network connectivity

- The unit should show a green network status light
 - If connection fails, verify your user code is correct
-

Next Steps

Now that you're connected, explore these essential features:

- **Set a Primary Device:** For quick access from the home screen
 - **Configure Notifications:** Customize which alerts you receive
 - **Add Emergency Contacts:** Set up quick access to important numbers
 - **Explore Your Panel:** Familiarize yourself with zones and areas
-

User Guides

This section covers advanced configuration options and premium features available in miAlarm. Proper configuration ensures optimal performance and user experience.

Primary Device Configuration

Primary Device Configuration

Understanding Primary Devices


A primary device is your most frequently accessed alarm system, receiving:

- Priority connection allocation
- Prominent home screen placement
- Faster response times

Setting Your Primary Device

Method 1: Home Screen Setup


1. Tap "Assign Primary Device" on the main screen
2. Select your preferred device from the available list
3. Confirm your selection

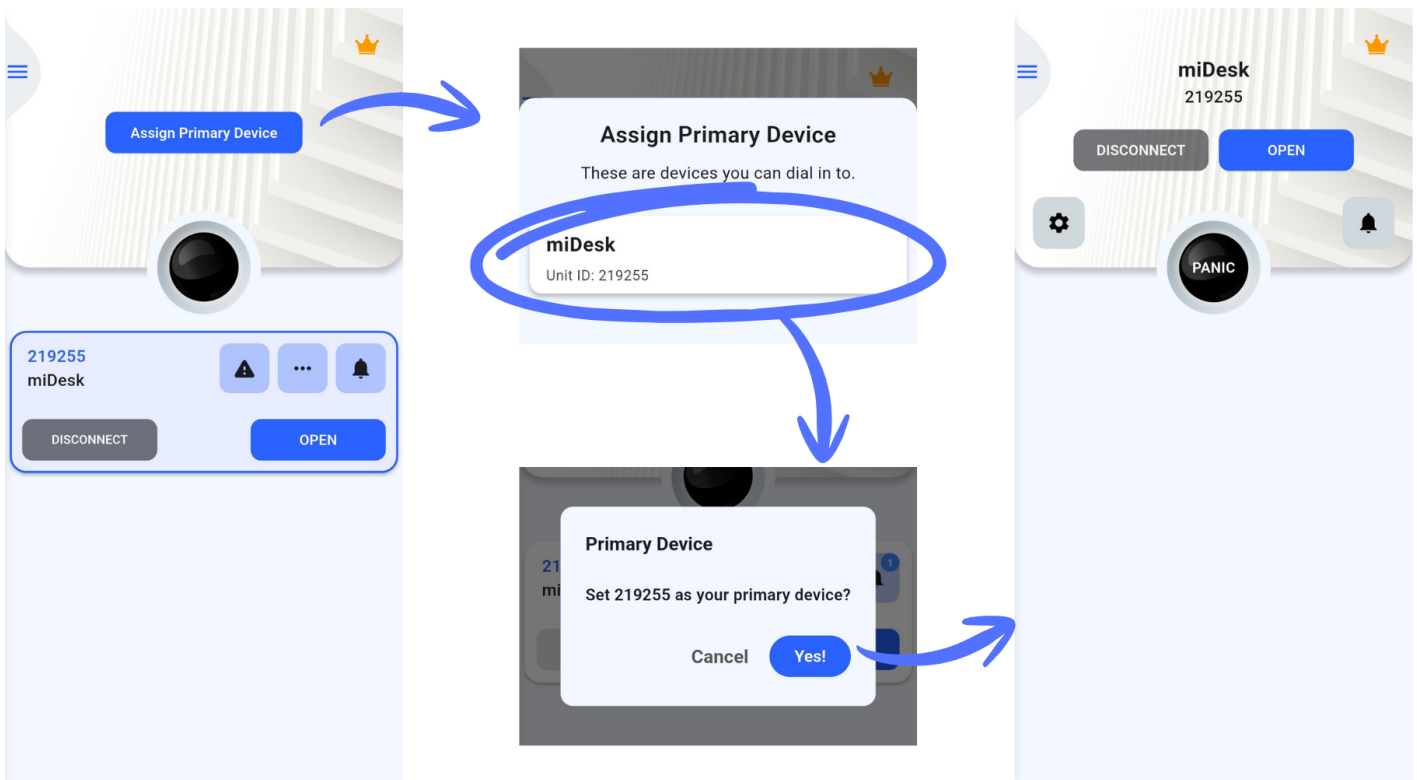

Method 2: Device Settings

1. Open device settings

2. Navigate to the "Primary" tab
3. Enable "Set as primary device"
4. Confirm the change

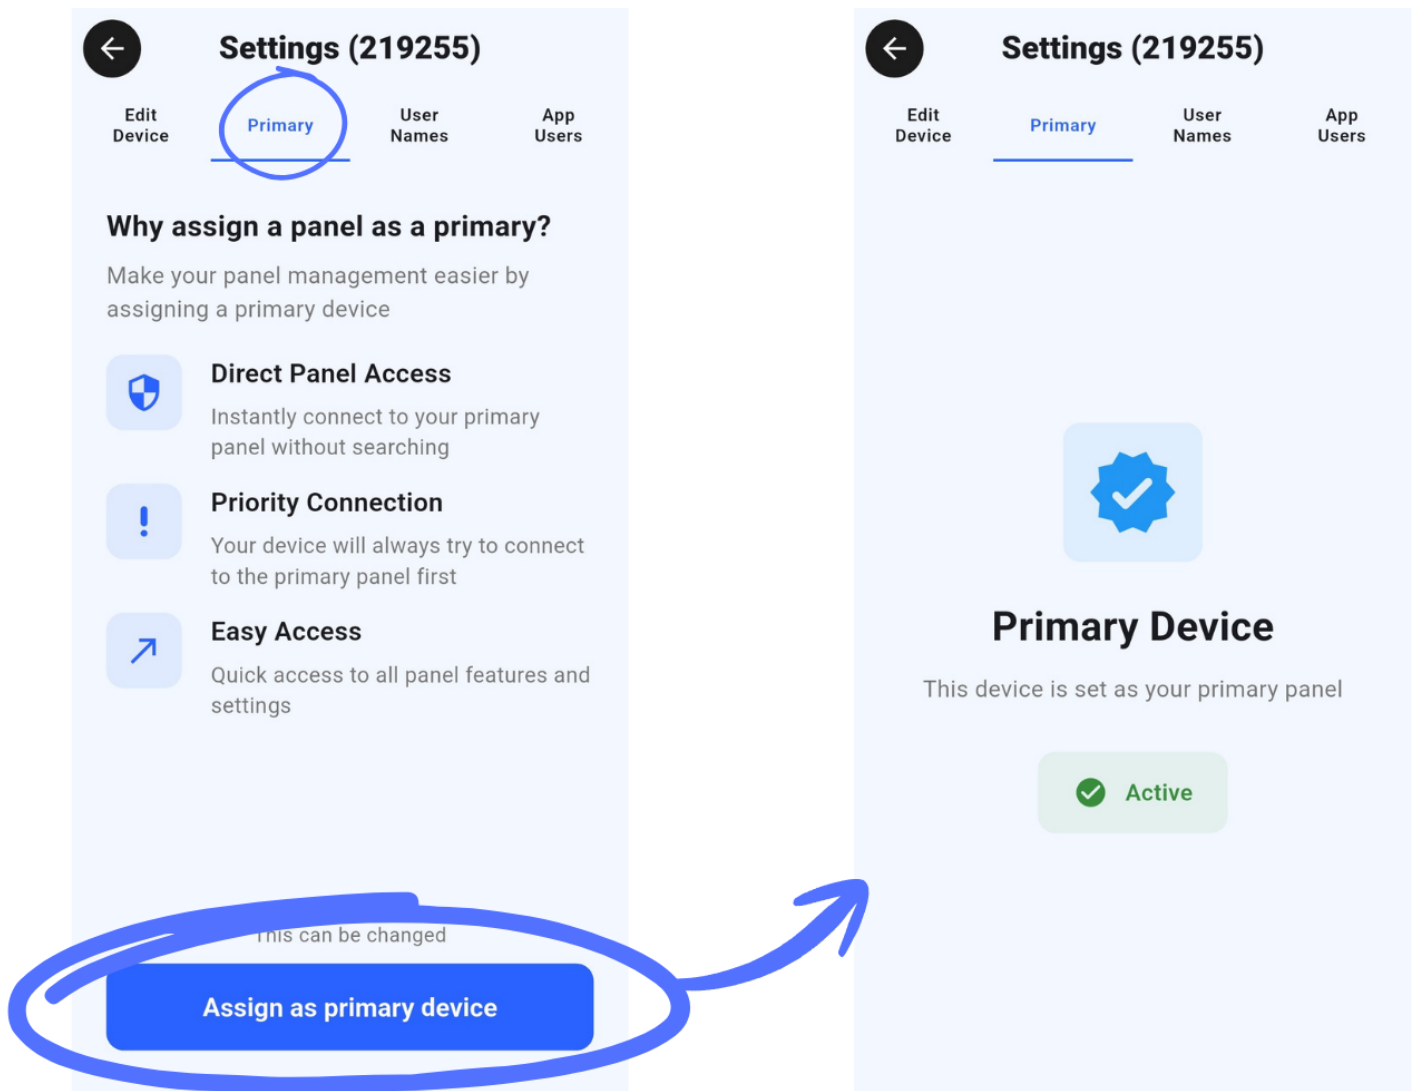

Managing Primary Status

- Only one device can be designated as primary
- Change primary designation at any time
- Remove primary status through device settings
- Visual indicators show current primary device

Zone Management

Zone Management

Zone Status Indicators

Color	Status	Meaning
☐ Green	Clear	Zone secure, no activity
☐ Blue	Bypassed	Zone disabled temporarily
☐ Red	Violated	Zone triggered/open
☐ Orange	Restored	Was violated, now clear

Managing Zones

View All Zones:

1. Tap grid icon
2. Heatmap shows all zones
3. Filter by status/area
4. Click for details

Edit Zone Info:

1. Tap the Zones Grid Icon
2. Select relevant Zone number
3. Tap Edit Zone
4. Update:
 - Zone name
 - Triggered Text
 - Clear Text
5. Save changes

? Bypassing Zones {#bypass}

What is Bypassing?

Temporarily disable specific zones while keeping others active.

When to Bypass

- Faulty sensor
- Maintenance work
- Leaving window open
- Pet in secured area
- Temporary access needed

How to Bypass

Method 1: Zone List

1. Expand area card
2. Find zone to bypass
3. Toggle switch OFF
4. Zone turns blue

Method 2: Heatmap

1. Switch to heatmap view
2. Tap zone tile
3. Select "Bypass"
4. Confirm action

Method 3: Quick Swipe

1. In zone list
2. Swipe right on zone
3. Quick bypass toggle

Managing Bypassed Zones

View All Bypassed:

1. Heatmap view
2. Filter → "Bypassed"
3. Shows blue zones only

Clear All Bypasses:

1. Disarm area
2. Re-arm without bypass
3. Or manually unbyypass each

Bypass Notifications:

- Alert when zones bypassed
 - Status in notifications
-

User Management

User Management

Understanding User Roles

The system supports multiple user types with varying permission levels:

- **Master Users:** Full administrative privileges
- **Standard Users:** Limited operational access

User Administration (Master Users Only)

1. Access device settings
2. Select "User Names" tab
3. View all users with system access
4. Manage user permissions and access levels

User Management Capabilities

Master users can:

- View complete user lists
- Remove standard user access
- Edit user display names

User Code Management

- Each user has a unique 4-digit code
 - Codes link to specific user profiles
 - All actions are logged for security
 - Regular code updates recommended
-

Notification Configuration

Notification Configuration

Comprehensive Alert Management

Customize your notification preferences to receive only the information you need, when you need it.

System-Wide Notifications

1. Access sidebar menu
2. Select "Notifications"
3. View consolidated message center

Device-Specific Settings

1. Open device settings
2. Navigate to "Push Notifications"
3. Enable or disable global notifications
4. Select specific alert types

Available Alert Categories

- **24-Hour Monitoring:** Always-active zone alerts
- **Access Events:** Entry and exit notifications
- **Auto Test:** Automated test results
- **Burglary:** Intrusion detection warnings
- **Bypass Notifications:** Zone override alerts
- **Fire Alarms:** Fire detection system alerts
- **Patrol Updates:** Security patrol confirmations
- **Medical Alerts:** Emergency medical notifications
- **Open/Close:** Standard opening and closing notifications
- **Open/Close Monitor:** Advanced opening and closing notifications
- **Panic:** Panic button activations
- **Supervision:** Monitored device notifications
- **System Messages:** General operational and maintenance notifications

Notification Best Practices

- Enable only essential notifications to avoid alert fatigue
- Test notification delivery monthly

- Ensure phone permissions are properly configured
 - Consider quiet hours for non-emergency alerts
-

Emergency Contact Management

Emergency Contact Management

Personal Emergency Contacts

Configure trusted contacts for emergency situations:

1. Add primary emergency contacts
2. Test contact functionality regularly

Official Emergency Services

Customize official emergency numbers for your region:

- Police Services (SAPS)
- Fire Department
- Medical Emergency Services
- Armed Response Units

Location Sharing Features

- GPS coordinate transmission
 - Manual sharing options available
-

Advanced Configuration

Advanced Configuration

Device Synchronization

Keep your device configuration current:

1. Access device settings
2. System retrieves latest configuration
3. Updates include:
 - Area definitions
 - Zone configurations
 - Smart action settings
 - User permissions

Operating Mode Selection

For compatible systems, switch between operational modes:

1. Navigate to Settings
2. Select "Mode" tile
3. Available options may include:
 - Standard Mode
 - Custom Panel Mode Configurations
4. Allow 2-3 minutes for mode changes to apply

Security Enhancements

Biometric Authentication

- Enable fingerprint or facial recognition
- Provides quick, secure access
- Password fallback always available
- Recommended for all users

Auto-Logout Protection

- 30-second inactivity timeout
- Prevents unauthorized access
- Applies to sensitive screens

Session Management

- "Remember Me" option for trusted devices
 - Biometric re-authentication required
 - Secure token storage
-

Privacy and Permissions

Required Permissions

The app requires specific permissions to function properly:

- **Location:** For emergency GPS sharing
- **Camera:** For QR code scanning
- **Notifications:** For alert delivery
- **Contacts:** For emergency contact integration

Privacy Considerations

- All data transmissions are encrypted
 - Location data only shared during emergencies
 - No background location tracking
-

Subscription Management

Subscription Management

Account Tiers

Free Account

- Connect up to 5 devices
- Access all core features
- No time restrictions

Pro Subscription

- Connect up to 10 devices
- Advanced feature access
- Early access to new features

Unlimited Subscription

- Connect an unlimited amount of devices
- Access to ALL features

Subscription Options

- **Monthly Pro Plan:** R14.99 per month
- **Annual Pro Plan:** R149.99 per year (save 17%)
- **Monthly Unlimited Plan:** R149.99 per month
- **Annual Unlimited Plan:** R1499.99 per year (save 17%)

Managing Your Subscription

To Purchase:

1. Tap the crown icon on home screen
2. Select your preferred plan
3. Choose payment method
4. Complete transaction through app store

To Manage Existing Subscription:

1. Navigate to sidebar menu

2. Select "Subscriptions"
 3. Manage through your app store account
 4. Modify or cancel as needed
-

Cancellation Emoji Feature

Support

FAQ

Find answers to common questions and solutions to typical issues.

Common Questions

General Questions

Q: What is miAlarm? A: miAlarm is a mobile app that allows you to control and monitor your Finmon security system remotely from your smartphone.

Q: Is miAlarm free to use? A: Yes! The basic version supports up to 5 devices. Premium subscriptions offer up to 10 devices and additional features with an Unlimited version allowing no cap on your devices.

Q: Which alarm systems are compatible? A: miAlarm works with Finmon-compatible alarm panels. Check your installer or the unit label for compatibility.

Q: Can multiple people access the same alarm? A: Yes, multiple users can access the same alarm system with their own login credentials and appropriate permissions.

Q: What is a "Dial-In"? A: Dial-In is the process where the app establishes a connection to your alarm unit, determining whether access is permitted.

Account Questions

Q: Can I use the same email for multiple accounts? A: No, each account requires a unique email address and phone number.

Q: I forgot my password. What do I do? A: Tap "Forgot Password" on the login screen and follow the reset instructions sent to your email.

Q: How do I change my username? A: Usernames cannot be changed after registration. Contact support if you need assistance.

Q: Can I transfer devices between accounts? A: Devices must be removed from one account before being added to another. Master user permission required.

Technical Support

App Performance Issues

App Crashes

1. Update to latest version
2. Clear app cache:
 - iOS: Delete and reinstall
 - Android: Settings → Apps → miAlarm → Clear Cache
3. Restart phone
4. Check available storage

Slow Performance

- Close background apps
- Check internet speed
- Reduce number of active devices

Battery Drain

- Disable unnecessary notifications
- Reduce background refresh
- Check location services settings
- Update to latest app version

Notification Problems

Not Receiving Notifications

1. **Phone Settings:**
 - Settings → Notifications → miAlarm → Allow
 - Check Do Not Disturb isn't active
 - Verify sound/banner settings
2. **App Settings:**
 - Device Settings → Push Notifications → ON
 - Select desired notification types
 - Check each device individually
3. **Network Issues:**
 - Ensure stable internet
 - Check if app is restricted
 - Verify background data allowed

Delayed Notifications

- Check internet connection
- Verify time zone settings
- Clear notification center
- Reinstall app if persistent

Zone & Sensor Issues

Zone Shows Wrong Status

- Refresh by pulling down
- Check physical sensor
- Verify zone programming
- Test in walk-test mode

Cannot Bypass Zone

- Some zones cannot be bypassed
- Check user permissions
- Verify area is disarmed
- Contact installer for zone type

Zones Not Updating

- Check connection status
 - Sync device data
 - Wait for full data load
 - Verify panel communication
-

Advanced Troubleshooting

Debug Mode

Enable for detailed logging:

1. Settings → About
2. Tap version number 5 times
3. Enable "Debug Mode"
4. Reproduce issue
5. Send logs to support

Factory Reset (Last Resort)

1. Delete app completely
2. Restart phone
3. Reinstall from app store
4. Register/login fresh
5. Re-add all devices

Network Diagnostics

Test connectivity:

- Ping alarm unit IP
- Check firewall settings
- Verify port forwarding
- Test on different network

Known Limitations

- Maximum 5/10 devices (free/paid)
 - 30-second activity timeout
 - Requires internet connection
 - Some panels need firmware updates
-

? Contact Support

Before Contacting Support

Gather this information:

- App version number
- Device model and OS version
- Unit ID and panel type
- Error messages (screenshots)
- Steps to reproduce issue

Support Channels

Email Support

- support@mialarm.co.za
- Response within 24-48 hours
- Include all relevant details

Emergency Support

- For alarm emergencies: Call your security company
- For app issues: Email support
- For account locks: Use password reset

Installer Support

Some issues require installer assistance:

- Panel programming
- User code changes
- Hardware problems
- Firmware updates

? Tips & Best Practices

Preventive Measures

- Keep app updated
- Test monthly
- Maintain good passwords
- Update contact info
- Regular connection tests

Optimization Tips

- Set primary device
- Customize zone names
- Use biometric login
- Enable relevant notifications only
- Regular cache clearing

Security Best Practices

- Never share login credentials
- Use strong passwords
- Enable biometric authentication
- Log out on shared devices
- Keep emergency contacts updated

Troubleshooting Tools

Troubleshooting Tools

Connection Problems

Connection Diagnostics

When experiencing connection issues:

1. Verify network status indicators
2. Confirm user code accuracy
3. Check dial-in authorization
4. Test unit power status
5. Contact the installation company

"Cannot Connect to Unit"

This is the most common issue. Check these items in order:

1. **Unit Power**
 - Confirm unit is powered on
 - Check for power LED indicator
 - Verify backup battery status
2. **Network Connection**
 - Green network light on unit
 - Test internet connectivity
 - Check cellular signal (if applicable)
3. **User Code**
 - Confirm 4-digit code is correct
 - Try code on physical keypad
 - Check with installer if needed
 - Ensure code has app permissions
4. **App Settings**
 - Dial-In is enabled
 - Unit ID is correct
 - Latest app version installed
 - Phone has internet access

"Connection Timeout"

Solutions:

- Wait 30 seconds and retry
- Force close and reopen app
- Check internet speed
- Try on WiFi instead of cellular
- Contact installer for unit reset

"Authorization Required"

What it means:

- Waiting for master user approval
- Device not yet authorized
- Previous authorization revoked

Solutions:

- Contact a master user
 - Check authorization status
 - Verify request was sent
 - Re-add device if needed
-

Account Issues

"Invalid Credentials"

Check:

- Username spelling (case-sensitive)
- Password accuracy
- Caps lock isn't on
- Using correct account

"Account Locked"

Caused by:

- Multiple failed login attempts
- Security protection activated

Solution:

- Wait 15 minutes
- Use password reset
- Contact support if persistent

"Duplicate Device" Error

Meaning:

- Device already on your account
- Check device list carefully

Fix:

- Pull down to refresh home screen
- Remove and re-add if needed

Multi-User Issues

"Cannot Remove User"

- Only master users can remove others
- Cannot remove other masters
- Cannot remove yourself

"User Limit Reached"

- Maximum users per device reached
- Remove inactive users
- Contact installer for limit increase

Reset Options

- Clear application cache
- Reset notification preferences
- Re-synchronize device data
- Remove and re-add devices

Debug Mode (Advanced Users)

For detailed diagnostic information:

1. Reproduce the issue
2. Open Menu.
3. Tap your name five times.
4. Logs options appears on the menu.
5. Share logs with support team

Remember: With great power comes great responsibility. Use advanced features wisely, and when in doubt, consult the documentation or contact support.

Support

Support

We're here to help you get the most out of your miAlarm experience.

Contact Information

Primary Support

Email Support

- **Email:** support@mialarm.co.za
- **Response Time:** 24-48 hours
- **Hours:** Monday-Friday, 8 AM - 5 PM SAST
- **Language:** English

What to Include in Support Emails:

1. Your account username
2. Unit ID (if device-specific)
3. App version number
4. Phone model and OS version
5. Detailed description of issue
6. Screenshots if applicable
7. Steps to reproduce problem

Emergency Contacts

For Alarm Emergencies:

- Contact your security company directly
- Use in-app "Call Control Room" feature
- For immediate danger: Call 10111 (SAPS)

Business Inquiries

Partnership & Integration

- Installer programs available
 - Corporate solutions offered
-

Help Resources

In-App Help

Help Icons (i)

- Found throughout the app
- Tap for contextual help
- Includes glossary terms

Tutorial Sections

- First-time setup wizard
- Feature introductions
- Tooltips and hints
- Interactive guides

Documentation

User Guides

- [Getting Started Guide](#)
- [Features and Settings](#)
- [Support](#)

Video Tutorials

- Coming soon on YouTube
- Setup walkthroughs
- Feature demonstrations
- Troubleshooting guides

Knowledge Base

Popular Articles:

1. [How to add a new device](#)
2. [Setting up notifications](#)
3. [Understanding zone colors](#)
4. [Configuring emergency contacts](#)
5. [Managing multiple users](#)
6. [Subscription Management](#)
7. [Troubleshooting connections](#)

Quick Solutions

Common Fixes

Issue	Quick Solution
Can't login	Check username/password, reset if needed
No connection	Verify unit power and network
Missing device	Pull down to refresh home screen
No notifications	Check phone and app settings
Slow performance	Clear cache, update app
Zones not updating	Sync device data in settings

Diagnostic Steps

Before Contacting Support:

1. Update to latest app version
2. Restart the app
3. Check internet connection
4. Verify unit is online
5. Try on different network
6. Review FAQ section

? Feedback

We Value Your Input

Share Feedback:

- Feature requests welcome
- Report bugs immediately
- Suggest improvements
- Rate the app

How to Provide Feedback:

1. Email suggestions
2. App store reviews
3. Social media comments

Feature Requests

Submission Process:

1. email support@mialarm.co.za
2. Provide detailed description
3. Explain use case
4. Include examples

What Happens Next:

- Team reviews all requests
 - Popular features prioritized
 - Updates on progress
-

Thank You!

[← FAQ](#) | [Back to Home](#)

Self-Service Tools

Self-Service Tools

Account Management

Password Reset

1. Login screen → "Forgot Password"
2. Enter registered email
3. Check email for reset link
4. Create new password
5. Login with new credentials

Update Contact Info

1. In-app profile settings
2. Edit email/phone number
3. Verify changes
4. Save updates

Device Management

Remove Device

1. Swipe device tile
2. Select "Remove"
3. Confirm deletion
4. Device removed from account

Transfer Device

1. Remove from current account
 2. New user adds device
 3. Master approval required
 4. Transfer complete
-